

# Sliding Door System Integra 100



ASSA ABLOY nv  
Glass Solutions  
Puursesteenweg 371  
2880 Bornem  
Tel: +32 (0)3 899 18 22  
Fax: +32 (0)3 899 14 11  
info@assaabloy.be  
www.assaabloy.be



## ASSA ABLOY

ASSA ABLOY is the global  
leader in door opening solutions,  
dedicated to satisfying  
end-user needs for security,  
safety and convenience.

## ASSA ABLOY

Glass Solutions

ASSA ABLOY, the global leader  
in door opening solutions

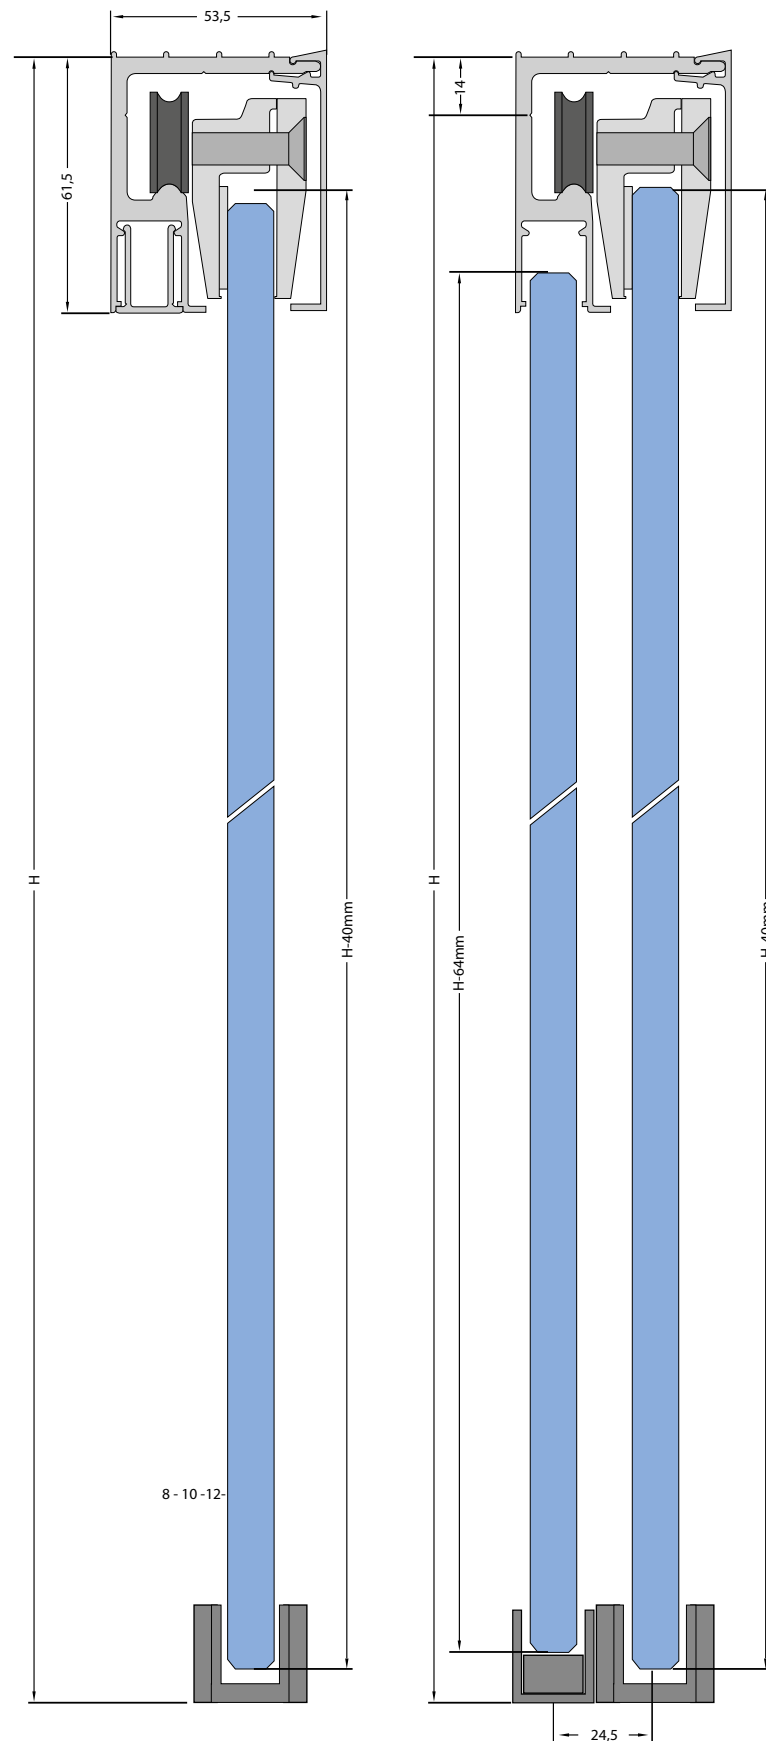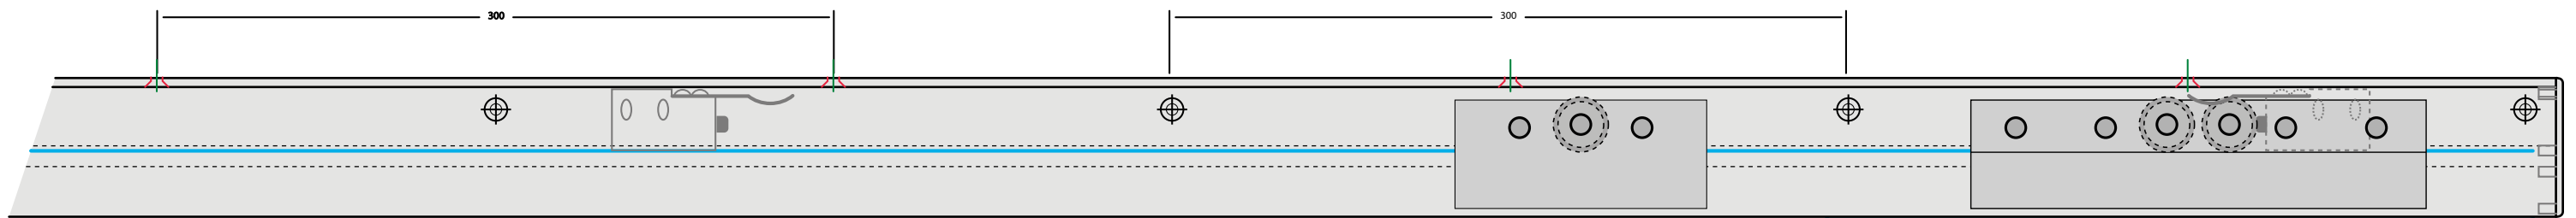

### TECHNICAL INFORMATION

Max. door weight 60/100kg  
Max. door height 3000mm  
For glass thickness: 8mm, 10mm, 12mm  
no glass preparation required

#### Track:

INT010 Aluminium track profile  
with integrated slot for fixed panel  
INT011 Aluminium filler profile  
for slot

#### Fascia:

INT061 Aluminium cover with  
integrated anti derail  
system

#### Glass clamp kit:

INT100 Universal Glass Clamp kit  
with max. capacity 60/100kg and gaskets for  
8mm, 10mm, 12mm glass  
Glass clamp kits consist of two glass  
clamps with 2 ball bearing rollers each, an  
adjustable floor guide and two retaining stops.

#### Accessories:

V252 Hook lock for sliding  
doors for 8mm, 10mm and 12mm.  
V253 Strike patch for V252  
V053 Strike plate for V252.  
VB94 Hook lock for sliding  
doors for 10mm and 12mm.  
VB95 Strike box for VB94.  
VB96 Strike plate for VB94  
V... Adjustable brush profile.

### GENERAL DESCRIPTION

The INTEGRA 100 Sliding Door System  
offers a solution for light and middle  
weight applications up to 100 kg as  
interior office doors and smaller glass  
partitions. It accommodates both sliding  
doors and fixed panels.



Using only 3 different profiles to cover all  
situations with or without fixed panels.

The distance between the sliding door  
and fixed panel is limited to a minimum.  
Track available predrilled for wall or ceiling  
mounting. Floor guide adjustable for  
different glass thicknesses. End caps are  
available in 3 finishes; silver, inox look  
and black.

